




USER MANUAL

BOOMIN


Product Code: BTS500

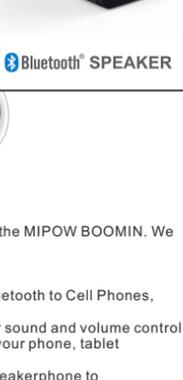

With Incredibly Big Sound!

www.mipow.com

Bluetooth® SPEAKER



WELCOME

Thank you for purchasing the MIPOW BOOMIN. We hope you enjoy it!

CONNECT CAN:

Connect wirelessly via Bluetooth to Cell Phones, Tablets and Laptops. Play music with a big clear sound and volume control. Chat with your friends on your phone, tablet or PC.

- Use the BOOMIN as a speakerphone to make calls, answer calls and more...


1 ABOUT BOOMIN

BOOMIN is a low energy Bluetooth V4.0 compliant, mini size speaker with incredibly big and clear sound and bass. It is compatible with most cell phones, tablets PCs, notebooks and most devices with built-in Bluetooth.

BOOMIN comes with 3 watts output power, its classic shape compliments the anodized aluminum-alloy colors. It also comes with a detachable leather hand strap for easier carrying. It also has a built-in microphone, so that it can be used as a portable Bluetooth speakerphone.

The built-in battery can support up to 9 hours of talk or music play time depending on volume and music type. It is compact in size; only measuring 55.6(W) x 73(L) x 55.6(H)mm. With its voice guidance, MIPOW's BOOMIN tells you what you need to know about pairing.

2 ACCESSORIES BOOMIN



Hand strap Micro USB cable

3 SPECIFICATIONS BOOMIN

Model: BTS500
Talk Time: Up to 9 hours
Music Playing Time: Up to 9 hours depending on volume and music type
Standby: 45 days
Charging Time: 2-3 hours (for full)
Weight: 153g
Dimensions: 55.6(W) x 73(L) x 55.6(H)mm
Colors: light blue/chocolate/red/black/silver
Low Energy Bluetooth Version: 4.0
Wireless Range: 10m (33 feet)
Support: A2DP/AVRCP/HFP
Charging Plug: 5 PIN micro-USB, B Type

4 OPERATION BOOMIN

Function	Operation	Voice prompt/Tone
Pairing	Press & hold for 7s	"Boot-up music" ...pairing
Power on	Press & hold for 3s	"Boot-up music"
Power off	Press & hold for 4s	"Power off music"
Answer call	Tap the button	"Beep"
Disconnect Call	Tap the button	"Beep"
Reject call	Double-Tap button	"Beep Beep"
Redial	Double-Tap button	"Beep"
Cancel dial	Tap the button	"Beep"

4 OPERATION...Continued BOOMIN

Function	Operation	Tone
Voice dial	Press & hold button for 2s	"Beep"
Stop voice dial	Press & hold button for 2s	---
Play / pause	Press & hold button for 1s	"Beep"
Previous song	Press & hold button for 2s	---
Next song	Press & hold button for 2s	---
Switch phone & BOOMIN	Press & hold button for 2s	"Beep"

4 OPERATION...Continued BOOMIN

Function	Operation	Tone
Volume up	Tap the button	"Beep"
Volume down	Tap the button	"Beep"
Answer call while in music play	Tap the button	---
EQ select	Simultaneously press & both buttons while playing music	"Beep"

4 OPERATION...Continued BOOMIN

Function	Operation	Tone
When 1st phone on call, 2nd phone is calling (Answer the 2nd phone call & End the 1st phone call)	Tap the button	"Beep"
When 1st phone on call, 2nd phone is calling (Answer the 2nd phone call & Hold the 1st phone call)	Double-tap button	"Beep"


VOICE PROMPT

Function	Voice Prompt
Pair	"Pairing"
Power on	"Boot-up music"
Power off	"Power off music"
Low battery	"Battery low"

5 PUT ON THE HAND STRAP BOOMIN



6 POWER ON / POWER OFF BOOMIN



- Press & Hold button for 3 seconds to **power on** the BOOMIN, a white LED will blink 3 times and ensuing "boot-up music" will be heard.
- Press & Hold button for 4 seconds to **power off** the BOOMIN, a white LED lights up for 2 seconds with ensuing "Power off music" prompt.

7 PAIRING with your 1st Phone BOOMIN


Pair BOOMIN with your 1st phone

Step 1. Turn on Bluetooth on your phone
Step 2. Turn on Bluetooth on an iPhone, iPod or iPad
 Go to **SETTINGS > GENERAL >** and enable Bluetooth.
Go to a Blackberry
 Go to **SETTINGS/OPTIONS > BLUETOOTH** and enable Bluetooth.
On an Android Phone
 Go to **SETTINGS > WIRELESS & NETWORK >** Bluetooth Settings and enable Bluetooth.
Other Cell Phones
 Please review the user manual that came with your device.

7 PAIRING with 1st Phone...Continued BOOMIN

Turn on your BOOMIN

- Press & Hold button for 7 seconds on your BOOMIN to activate pairing mode of the BOOMIN
- you will hear the "boot-up music" at the 3rd second and the voice prompt "pairing" at the 7th second and a white LED will blink during pairing.



7 PAIRING with 1st Phone...Continued BOOMIN


- Open your phone's Bluetooth settings, add or search for devices when "MIPOW_BOOMIN" appears, select it or enter pass code "0000" if asked.

CONNECTIVITY	DEVICES FOUND	MIPOW_BOOMIN	HANDSFREE
CONNECTIVITY Bluetooth Infrared port Wap options Synchronization Networks SELECT	DEVICES FOUND MIPOW_BOOMIN SELECT	MIPOW_BOOMIN Passkey: **** OK	HANDSFREE MIPOW_BOOMIN added. The handsfree is now ready for use SELECT

- You will hear "beep" sound from BOOMIN once it is paired with your phone, the LED flashes twice every 7 seconds while paired.

7 PAIRING with 1st Phone...Continued BOOMIN


Battery meter on iPhone shows up automatically when paired and connected.



8 PAIRING with your 2nd Phone BOOMIN

Pairing with TWO phones for the first time

- When pairing BOOMIN with a second device, it needs to be restarted and initial the pairing mode procedure described above followed.
- Go to your phone's Bluetooth settings, locate the menu item "add or search for devices". When "MIPOW_BOOMIN" appears, select it or enter passcode "0000" if asked.
- "Beep" tone will be heard once paired.




8 PAIRING with 2nd Phone...Continued BOOMIN

NOTE:
 If your BOOMIN is connected before, then it will automatically reconnect the last connected mobile device. Otherwise, you need to repeat the steps in 7. (i.e. Pages 10 - 13) for the pairing details.

Deactivate BOOMIN pairing mode

- Under pairing mode, BOOMIN will deactivate if there is no connection within 90 seconds.
- For 5 minutes without connection, BOOMIN will power off automatically.

9 PLAY MUSIC BOOMIN



- While listening to music, Press & Hold button for 1 second to play or stop music, "beep" tone will be heard.
- During music play, Press & Hold button for 2 seconds to play the previous song and Press & Hold button to play the next song.
- During a call or music play, press button to volume up and button to volume down.

9 PLAY MUSIC...Continued BOOMIN

- The music will pause if there is an incoming call; Tap the button to answer the call. The music will play automatically once you end the call.


EQ Select (Equalizer-Audio effect)
 2 types of EQ - "Mega Bass" and "Rock" can be selected. While playing music, simultaneously Press & Hold & both buttons, "beep" tone can be heard and "Mega Bass" is selected.

Simultaneously Press & Hold & both buttons again, "beep" tone can be heard and "Rock" is selected.

10 TALKING - paired with one phone BOOMIN

Speakerphone

You can use the BOOMIN as a speakerphone by connected wirelessly with Bluetooth to your phone, tablet or PC so that you can make calls or answer calls by speaking to the built-in microphone as shown below.



10 TALKING - paired with one phone... BOOMIN

Answer a Call
 Tap the button to answer an incoming call, a "beep" tone can be heard.

Reject a Call
 Double-tap button to reject an incoming call, a "beep...beep" tone can be heard.

End a Call
 While on a call, tap the button to disconnect and end the call, a "beep" tone can be heard.

Redial the Last Number Called
 To redial the last number called, Double-tap button, a "beep" tone can be heard.

Cancel a Call
 To cancel a Call, Tap the button, a "beep" tone can be heard.

Initiate a Voice Dial
 To initiate a voice dial, Press & Hold button for 2 seconds, then speak a command or a name.

10 TALKING - paired with one phone... BOOMIN

Switch call from BOOMIN to Phone

While you are speaking with the speakerphone of BOOMIN and you want to switch the call to the Phone, just Press & Hold button for 2 seconds to transfer the call from BOOMIN to Phone.

11 TALKING - paired with two phones BOOMIN

Tap the button once to answer a call from either one of the paired phones.

Tap the button to end the 1st Phone's call and answer the 2nd phone's calling call. If you want to hold the 1st phone's call, Double-tap button to hold the call.

12 LED INDICATOR BOOMIN

Connected	LED blinks twice every 7 seconds
Disconnected	LED blinks twice every 2 seconds
Incoming call	LED blinks once every 7 seconds
Talking	LED blinks once every 7 seconds
Power on	LED lights for 3 times
Power off	LED lights for 2 seconds
Pairing mode	LED blinks quickly
Music play	LED twinkles continuously
Charging	LED remains on
Charging complete	LED is off

13 CHARGING BOOMIN

Use the included micro USB cable to connect BOOMIN to a USB wall charger or any powered USB device.

- When BOOMIN battery level is low , there will be a voice prompt "Battery low".
- LED remains "ON" during charging.
- LED is "OFF" when charging is completed.
- Fully charge BOOMIN takes 2-3 hours.
- If you charge BOOMIN without turning it off, it will remain connected to your mobile devices.

14 TROUBLE SHOOTING & FAQ BOOMIN

I hear crackling noises
 For the best audio quality, keep the BOOMIN close to your mobile device.

I cannot hear anything from BOOMIN

- Confirm that the BOOMIN is paired to the device.
- Make sure that the phone is connected to the BOOMIN, if it does not connect either from the phone's Bluetooth menu or by pressing the button; follow the pairing instructions in Section 7.

I have pairing problems
 You may need to delete your BOOMIN pairing connection from your mobile device and re-pair the devices. Follow the pairing instructions in Section 7.

Will the BOOMIN work with other Bluetooth devices ?
 Yes, the BOOMIN is designed to work with Bluetooth mobile phones. It can also work with other devices that are compliant with Bluetooth version 4.0 and support a hands-free profile, A2DP music play.

14 TROUBLE SHOOTING & FAQ BOOMIN

I cannot use reject call, redial or voice dialing, battery App meter

These functions are dependent on your phone supporting them. Please check your mobile phone's manual for further details.

15 CARE INSTRUCTIONS BOOMIN

Taking care of your BOOMIN

- Always store the BOOMIN with the power off and safely protected.
- Avoid storage at extreme temperatures (above 45°C or below -10°C). This can shorten battery life and may affect operation.
- Do not expose the BOOMIN to rain or other liquids.

16 Environmental Protection BOOMIN

After the implementation of the European Directive 2002/96/EU in the national legal system, the following applies: Electrical and electronic devices must not be disposed of with domestic waste. Consumers are obliged by law to return electrical and electronic devices at the end of their service life to the public collection points that are set up for this purpose or designated points of sale. However, such details are defined by the national law of the respective country. This symbol on the product, the instruction manual or the packaging indicates that the product is subject to these regulations. By recycling, reusing the materials, or other forms of utilizing old devices, you are making an important contribution in protecting our environment.

17 FCC STATEMENT BOOMIN

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

17 FCC STATEMENT...Continued BOOMIN

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARRANTY CARD

Limited Warranty

Thank you for your purchase of MIPOW's product. MIPOW warrants that the product is, at the time of its original purchase is free of defects in workmanship and material. This Limited Warranty for the product shall last for twelve (12) months from the date of original purchase.

This original warranty card and original invoice must be presented at the time you require warranty service or such warranty will be voided.

This limited warranty is valid only if the product is used for the purpose for which it was designed. It does not apply to damage or loss caused by negligence; physical abuse; misuse; accident; exposure to moisture; dampness or extreme thermal; unauthorized modifications; unauthorized opening or repair; acts of nature; or other actions beyond the reasonable control of MIPOW.

In case of when the warranty does not apply, a repair or replacement charge will be incurred. The customer shall be responsible for sending the defective product to and collecting the repaired or replaced product from the service center.

NB: MIPOW reserves the right to interpret the terms and conditions contained herein, and the right for any changes without prior notice.

CUSTOMER SERVICE

For FAQs and more information on this product, please go to www.mipow.com.

© 2015 MIPOW. All rights reserved. PLAYULB is a trademark of MIPOW